


Measurement instruction: Cabinet with slant on the left

Step 1:

Enter the measurements (cm) in the corresponding boxes.

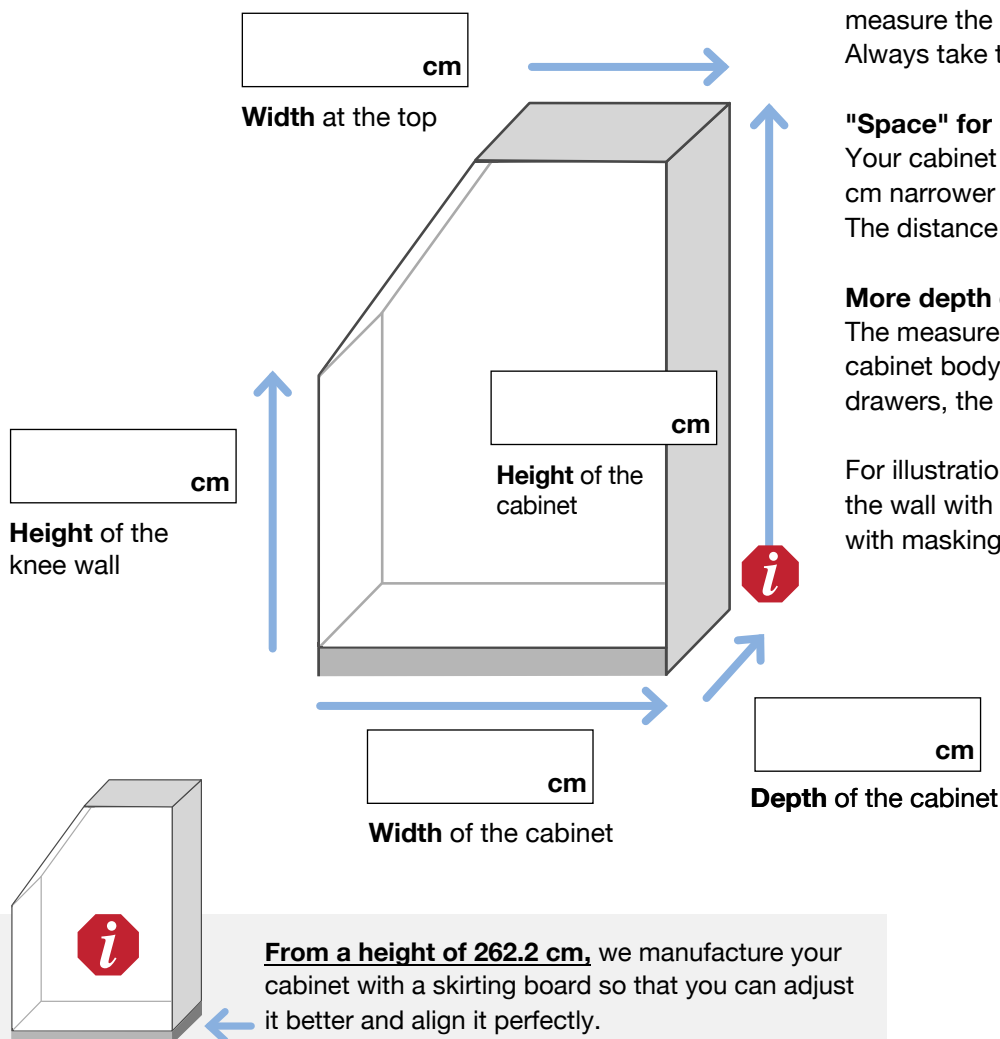

Required tools:

Tape measure or folding rule, pen, and the printed measurement guide.

How to measure correctly:

Draw the cabinet 1:1 on the back wall and measure the height and width in several places. Always take the smallest measurement.

"Space" for easy installation:

Your cabinet must be at least 3 cm lower and 6 cm narrower than the room or installation niche. The distance to the slant must be 3 cm.

More depth due to doors and front drawers:

The measurement for the depth refers to the cabinet body. If you plan to add doors or front drawers, the cabinet depth will increase by 2 cm.

For illustration, draw the outline of the cabinet on the wall with a pencil. You can protect the wall with masking tape.

Step 2:

After measuring, you can quickly and easily enter the data into the cabinet configurator at <https://www.Furnfab.com/en/products-for-roof-slopes>.

Need help?

If you have any questions, our team is happy to assist you!

You can easily and quickly reach us via e-mail, through our website, or by phone:

E-mail: service@furnfab.com

Contact form: <https://www.furnfab.com/en/contact>

Phone: +44 (0) 131 608 34 77